



<b>Parts List</b>	
QTY	
1	Set, Tail Lights
1	Installation Hardware Bag

**Difficulty Level: Easy**

**Product Support**

**1-888-531-7183**  
[info@combat-offroad.com](mailto:info@combat-offroad.com)

<b>Tool List</b>	
	Ratchet
	Flat Blade Screwdriver
	Socket Set - 7/16" deep socket
	Hex Key Set - 5/32" hex key
	7/16" Wrench



**Notes and Maintenance**

**\*IMPORTANT NOTE\*** The resistor will get hot - do not bundle the resistor up with the rest of the wiring harness. During installation, ensure the resistor is away from the other wiring - some customers use high-heat double-sided tape, metal zip ties or other high-temp fasteners (machine screws or nuts/bolts). Failure to keep the resistor away can result in melting of the wiring harness or other damage making the lights inoperable. Damage caused by improperly located resistors is not covered by warranty.

Before you begin installation, read all instructions thoroughly.

Proper tools will improve the quality of installation and reduce the time required.

Periodic inspections should be performed to ensure all mounting hardware remains tight.

Mild automotive detergent may be used to clean the product. Do not use dish detergent, abrasive cleaners, abrasive pads, wire brushes or other similar products that may damage the finish.

**Feedback**

COMBAT OFF ROAD industry leading warranty. Register your purchase by visiting: [www.combat-offroad.com/registration](http://www.combat-offroad.com/registration)

Be social, tag us on your install or out on the trail enjoying, use: #combatoffroad



### Step 1

#### Factory Light Removal

Open the back of the vehicle and using a flat blade screwdriver, pop out the cover at the top of the rear fender.

Using a 10mm socket, loosen the factory mounting hardware holding the tail light on the vehicle body.

**IMPORTANT** - the factory hardware is plastic, use caution

Once the mounting hardware is removed, pull the tail light out from the vehicle body and disconnect the electrical harness.

Slide the red tab down that locks the electrical connection, push the black tab down and separate the connectors.

Repeat process for opposite side of vehicle.



Removal of interior cover



Removal of retaining hardware



Factory hardware reference



# TAIL GUNNER ARMOR TAIL LIGHT KIT

## Installation Instructions JEEP WRANGLER JL


### Step 2

#### Installation Of New Light Assemblies

Remove the center light from the mounting bracket, this is required to allow access inside the body opening with installing the new hardware. Gently push the light out of the bracket, pushing toward the rear of the vehicle.

Using the "J" hook hardware, hook the opening onto the back side of the mounting bracket tab and align the threaded portion with the hole in the vehicle body where you removed the mounting bolt for the factory light.

Secure loosely with the supplied washer and nut.

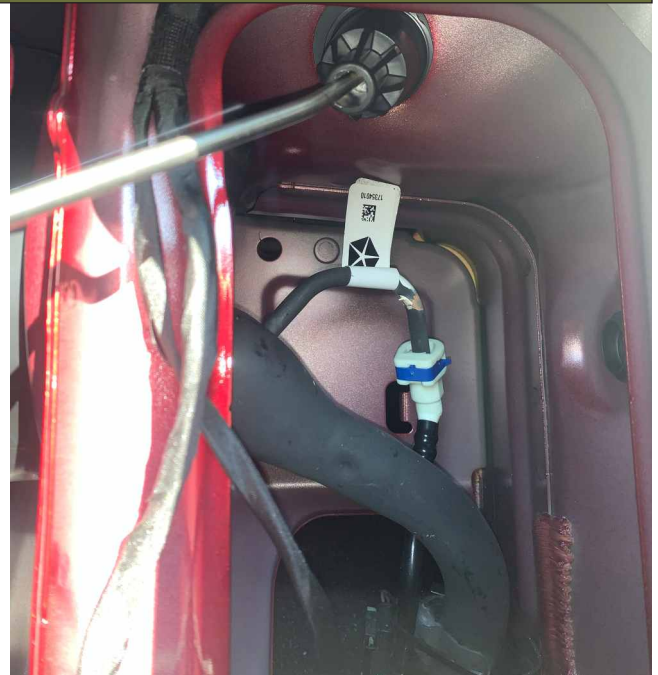

### Step 3

Install the countersunk screws into the openings on the bracket and align into the holes on the vehicle body.

Secure loosely with the supplied washers and nuts.





# TAIL GUNNER ARMOR TAIL LIGHT KIT

## Installation Instructions JEEP WRANGLER JL

### Step 4

Position the bracket to align with vehicle body and tighten the hardware to finish the bracket installation.


Connect the supplied harness to the vehicle.

Position the heat sink attached to the wiring harness (Gold Part in Image) inside the rear opening on the vehicle body so that it will not contact the wiring during operation.

Reinstall the rear light mounting gasket and light assembly.

**Note:** Putting a mixture of mild soap and water on the mounting gasket and the body of the light will ease the installation process for final fit of the light into the bracket.

Repeat for the other side of the vehicle.

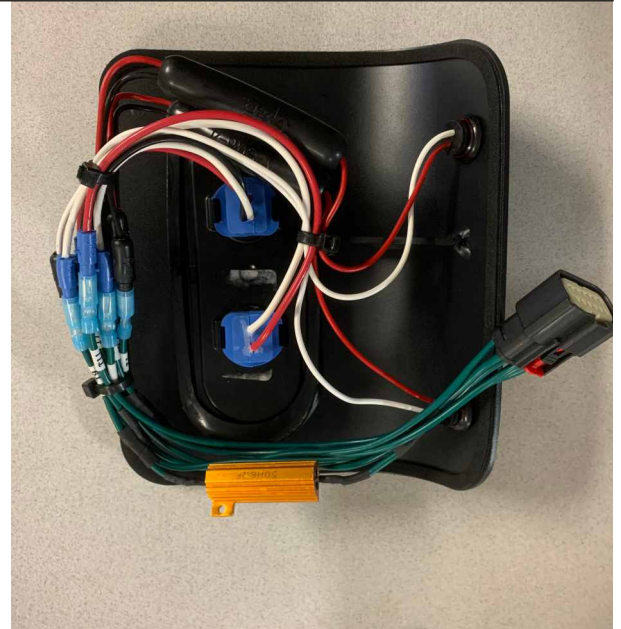

**DISCLAIMER:** The Combat Off Road LED tail light kit (Tail Gunner Tail Light Kit) is not designed or recommended to be used or installed on any Jeep JL or JT Gladiator that are equipped with the blind spot monitoring system. If you choose to disable the blind spot monitoring system with a tuner, programmer or any other computer interface device (i.e. Tazer from Z Automotive, Superchips Flashcal+, etc), Combat Off Road does not accept any responsibility or liability for the compromise of the safety features or any injury, damages, claims, expenses, or responsibility that may be caused or alleged to be caused, in whole or in part, by the removal of those features. Combat Off Road recommends the Tail Gunner Tail Light Kit be used for off road use only.

**WARNING:** Cancer and Reproductive Harm - [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)