

ROUGH COUNTRY

SUSPENSION SYSTEMS®

JEEP JL PILLAR MOUNT BRACKETS

Thank you for choosing Rough Country for all your Off road needs.

Please read instructions before beginning installation. Check the kit hardware against the kit contents shown below. Be sure you have all needed parts and know where they go.

KIT CONTENTS

6mm x 50m Long Button Head (2)
Dr and Pass Bracket (1 each)
Spacers (2)

TOOLS NEEDED

T40 Wrench
T50 Wrench
4mm Allen Wrench

INSTALLATION INSTRUCTIONS

1. Remove the factory hardware as shown in **Photo 1** using a T-40 wrench.
2. Loosen the windshield hinge bolt using a T50 wrench as shown in **Photo 2** but do not remove.

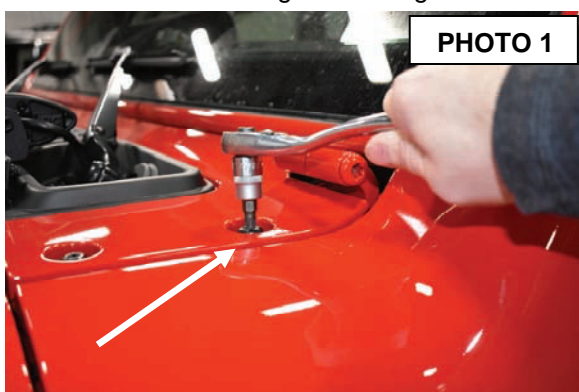


PHOTO 1



PHOTO 2

3. The light harness can be routed through the side cover at this time. The cover will be removed using a T40 wrench. **Photo 3** shows wiring path into engine compartment.
4. Place the supplied spacer in the stock location as shown in **Photo 4**.
5. Reinstall the side cover and install the bracket as shown in **Photo 5** utilizing the factory hardware on the windshield hinge and using the supplied 6mm x 50mm button head bolt. It is recommended that the mounting stud for the light be installed prior to tightening the bracket.
6. Tighten hardware with 4mm allen wrench and T-50 wrench.
7. Repeat for opposite side. Install lights on mounting brackets.

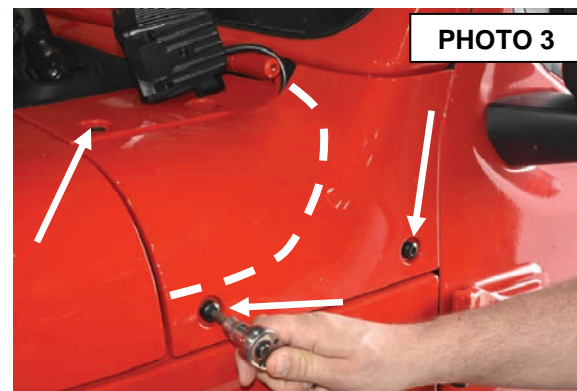


PHOTO 3

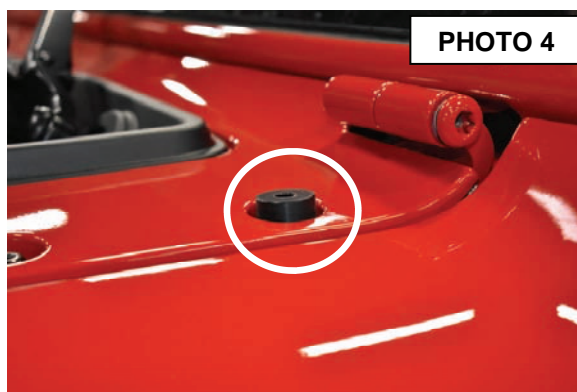


PHOTO 4

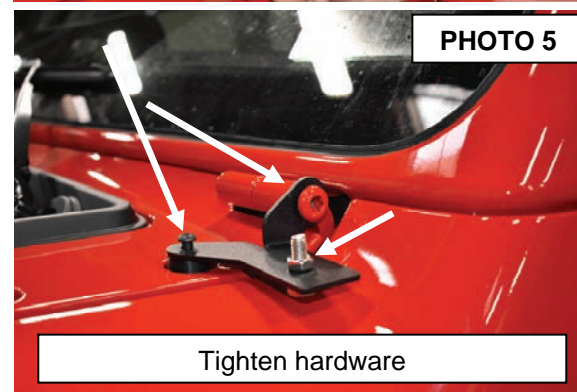


PHOTO 5

Tighten hardware

By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable, State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.

